

MANUFACTURER	Aspen Aerials "UBs"						Paxton-Mitchell "SNOOPERS"			MOOG Truck Units			MOOG Trailer Units		
Model Name	A-75	A-62	UB-60	A-40	UB-32 Hi-Rail	UB-30 Hi-Rail	PM 264	Series 260	Peeper	MBI-70T	MBI-90T	MBI-200T	MBI-70	MBI-90	MBI-210
Horizontal Range	75'	62'	60'	44.6'	32'	30'	64'	60'	19'6"-24'	24.1'	29.7'	66'	23.1'	29.7'	68'10"
Max Lowering Depth	85'	68'	70'	47.3'	40'	40'	65'	70'	19'3"	17.3'	21.5'	31.4'	17.3'	21.5'	32.9'
Rotation of Main Turret	270°	270°	270°	270°	270°	270°	270°	270°	90°	180°	180°	180°	180°	180°	180°
Rotation of 2nd Turret – Total of both sides	280°	280°	280° all but #1160	280°	280°	280°	280°	280°		200°	200°	200°	200°	200°	200°
Width of Platform	3 Man Bucket	3 Man Bucket	3 Man Bucket	3 Man Bucket	3 Man Bucket	3 Man Bucket	3 Man Bucket	3 Man Bucket	2 Man Bucket	3.3'	3.3'	4.6'	3.3'	3.3'	5.6'
Length of Platform										23.1'	29.7'	66'	23.1'	29.7'	69.3'
Max Load on Platform	700 lb.	600 lb.	600 lb.	600 lb.	600 lb.	600 lb.	600 lb.	600 lb.	600 lb.	880 lb.*	990 lb.*	1,760 lb.*	880 lb.*	990 lb.*	2,200 lb.*
Overall Width	8.5'	8.5'	8.5'	8.5'	8.5'	8.5'	8.5'	8.5'	8.5'	8'	7.9'	8.3'	7.3'	7.9'	8'2"
Overall Height	13'5"	13'3"	13'3"	12'5"	11'6"	11'6"	13'	13'6"	12'3"	11'6"	12'6"	13'6"	11.5'	11.6'	13'1"
Overall Length	41.8'	40'	41'	41'	41'	41'	40'	41'	26'4"	30'	29.7'	42.9'	28.1'	29.7'	42.9'
Space Required	8'	8'	8'	8'	8'	8'	8'	10.3'	10'	8'	7.9'	9.5'	9.2'	10'	9.5'
Dry Weight	82,590 lb.	67,500 lb.	65,110 lb. - 67,340 lb.	59,120 lb.	52,000 lb.	52,000 lb.	77,200 lb.	62,500 lb.	18,600 lb.	18,000 lb.	25,000 lb.	66,000 lb.	8,000 lb.	10,340 lb.	72,600 lb.
Tongue Weight													400 lb.	600 lb.	

Note: All Specs Are Approximate

*Cut weight in half at maximum platform length.

** MOOG Trailer Units— the space between outriggers and vertical tower is about 33', MOOG Truck Mounted Units are non-outrigger, from edge of truck to inside tower is 1 meter, approx. 40". MOOG 210 has 2m horizontal extension to 75' (requires Elliott).

*** Must Specify if Dual Deployment is required. Paxton-Mitchell Series 260 deploys off Right Side Only as do some UB-60's.

**** Paxton-Mitchell Series 260—UNIT#1200—No telescopic 4th boom—55' horiz. Reach, 60' vert. reach.



Underbridge Access Equipment Rentals
(888) 889-1284 office • info@mcclain1.com

www.McClain1.com

McClain & Co., Inc. (Rev. 04/03/2020)


All McClain & Co., Inc. Underbridge Inspection Unit drivers/operators have been certified and licensed in compliance with the new changes to ANSI A92.22-2018 and ANSI A92.24-2018 standards through 2024 by **AMP Sales & Services, LLC.**

AMP Sales & Services, LLC is the only *IPAF-approved training center that offers training on vehicle-mounted Bridge Inspection and Maintenance devices (2b).

The category (2b) denotes a MEWP that can be operated from the chassis while the platform is extended. Vehicle-mounted bridge-inspection and maintenance devices are currently addressed by ANSI A92.8 and is one of four ANSI A92 standards that has been replaced with the new ANSI A92.20-2018, A92.22-2018, and A92.24-2018

The new ANSI A92 Suite of Standards will become effective June 1st, 2020.

Each UBIU operator carries a certification card with him or her at all times.

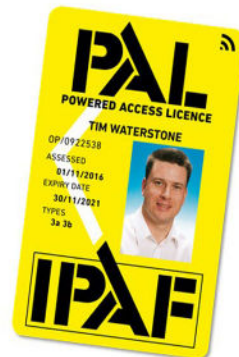

*International Powered Access Federation

McClain & Co., Inc.

Corporate Office

19152 Germanna Hwy
Culpeper, VA 22701
info@mcclain1.com
(888) 889-1284 Toll Free
(540) 423-1110 office
(540) 423-1066 fax

NE Regional Office

597 Saybrook Rd.
Middletown, CT 06457
connecticut@mcclain1.com
(888) 868-2118 Toll Free
(860) 343-1680 office
(860) 343-1491 fax

NJ/NY Regional Office

321 Valley Road
Hillsborough, NJ 08844
newjersey@mcclain1.com
(917) 939-2227 office


SE Regional Office

1320 Yorktown St.
DeLand, FL 32724
florida@mcclain1.com
(386) 740-7888 office
(386) 740-7847 fax



www.McClain1.com

**Certified & Licensed
Underbridge
Inspection Unit
Operators in
compliance with the
new ANSI A92
Suite of Standards!**

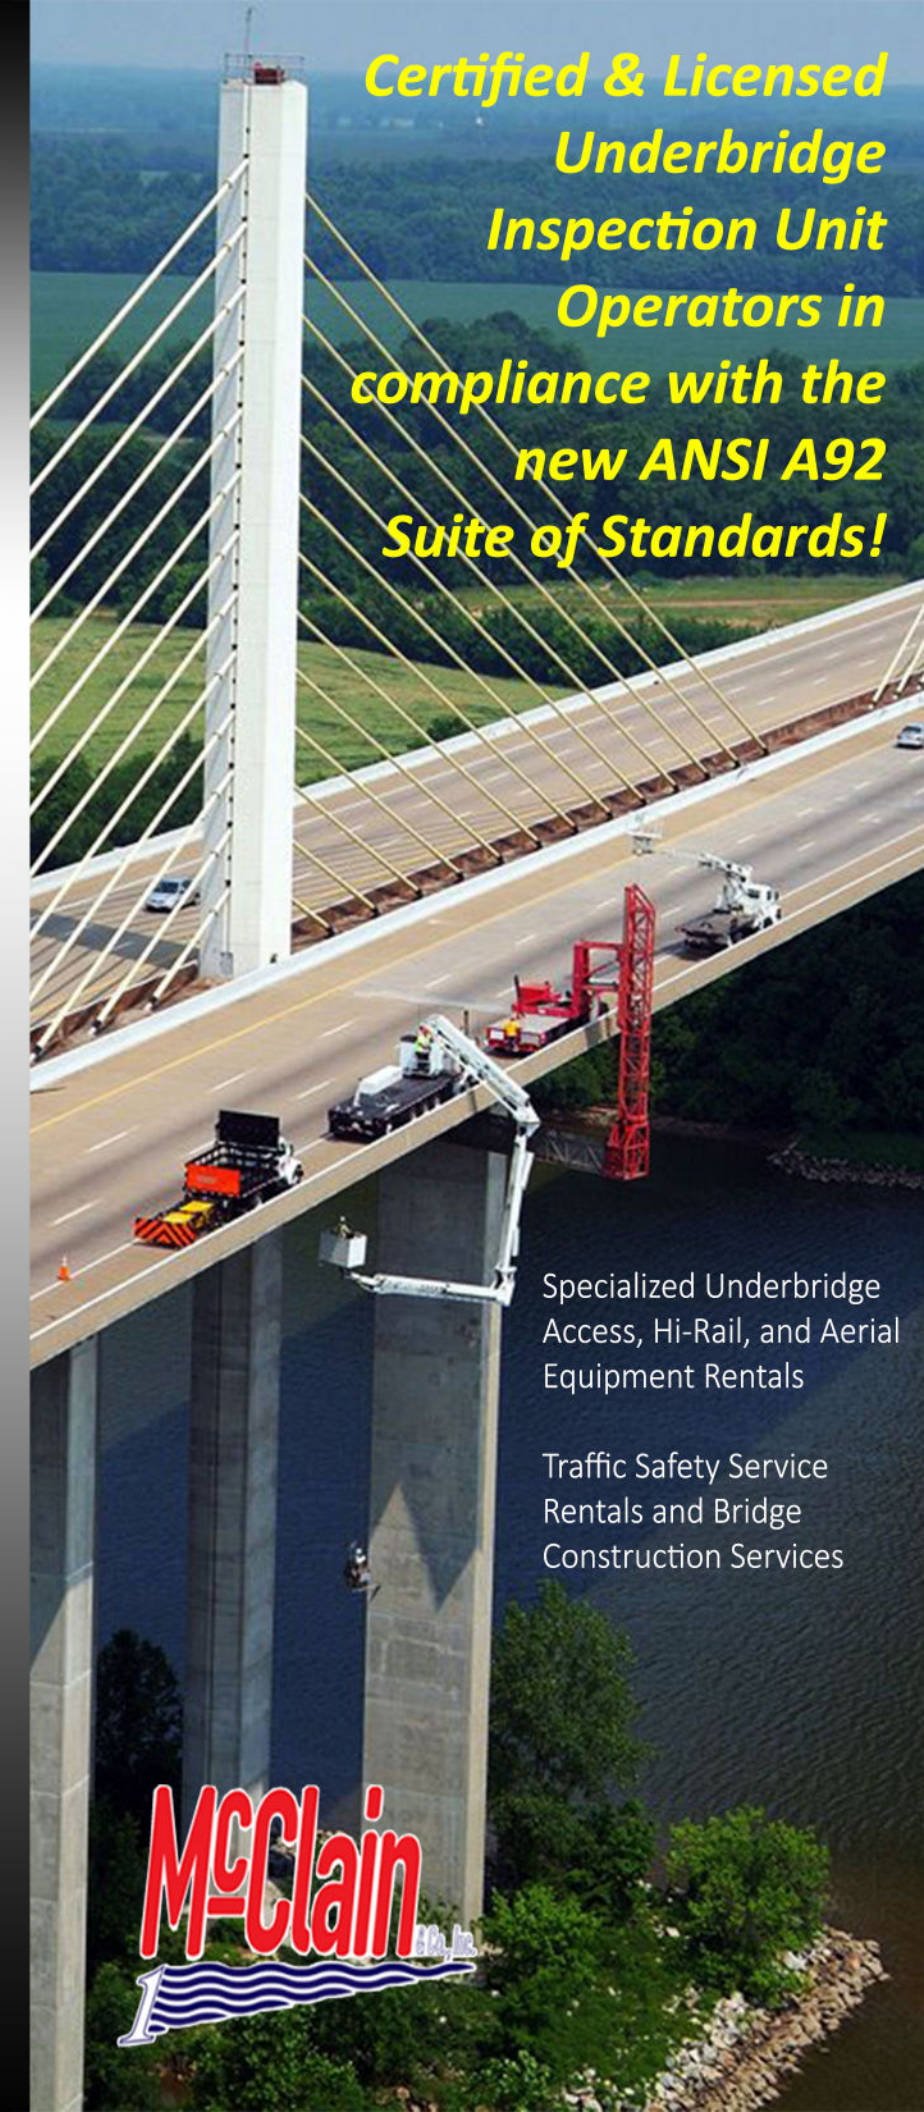

Specialized Underbridge
Access, Hi-Rail, and Aerial
Equipment Rentals

Traffic Safety Service
Rentals and Bridge
Construction Services

